


Air through perfection


# Perforated grille

# PF-F

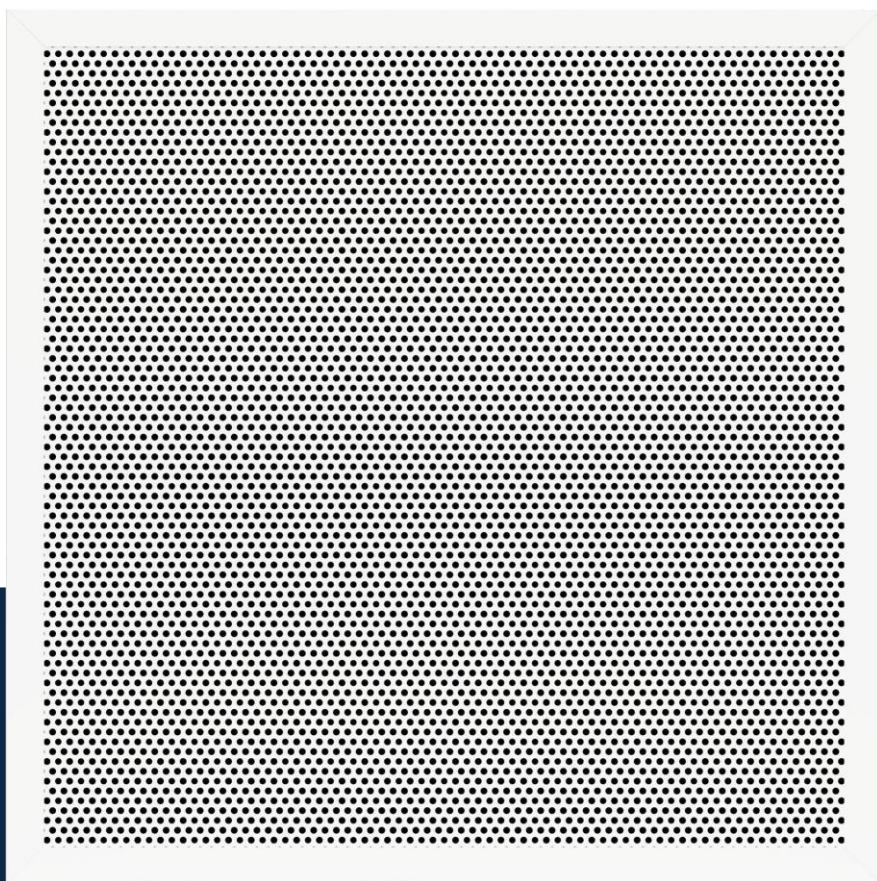

**ACP**  
Grilles

## Perforated grille PF-F

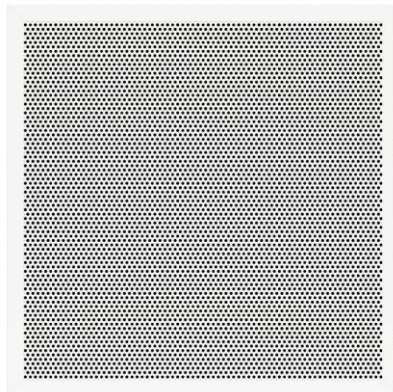

### Description

Rectangular grille with circular perforations, used for introducing or evacuating air.

Perforated grille can be used in installations with constant or variable air flow with ceiling or wall mounting.

### Technical specifications

#### Characteristics

The grille is provided with circular perforations with a diameter of 5 mm.

As standard, the grille is manufactured with holes for screw mounting, except for the size 595x595 mm (external dimensions) for the false ceiling 600x600 mm.

The product is delivered with fixing screws.

For installation with a mounting frame, the grille is accessorized with fixing clips.


## Materials

The grille is made of extruded aluminum profiles (frame) with the central part of galvanized steel sheet provided with circular perforations.

Standard grille is electrostatic field painted in glossy white RAL9016.


Other RAL colours are available on request.

## Technical drawing

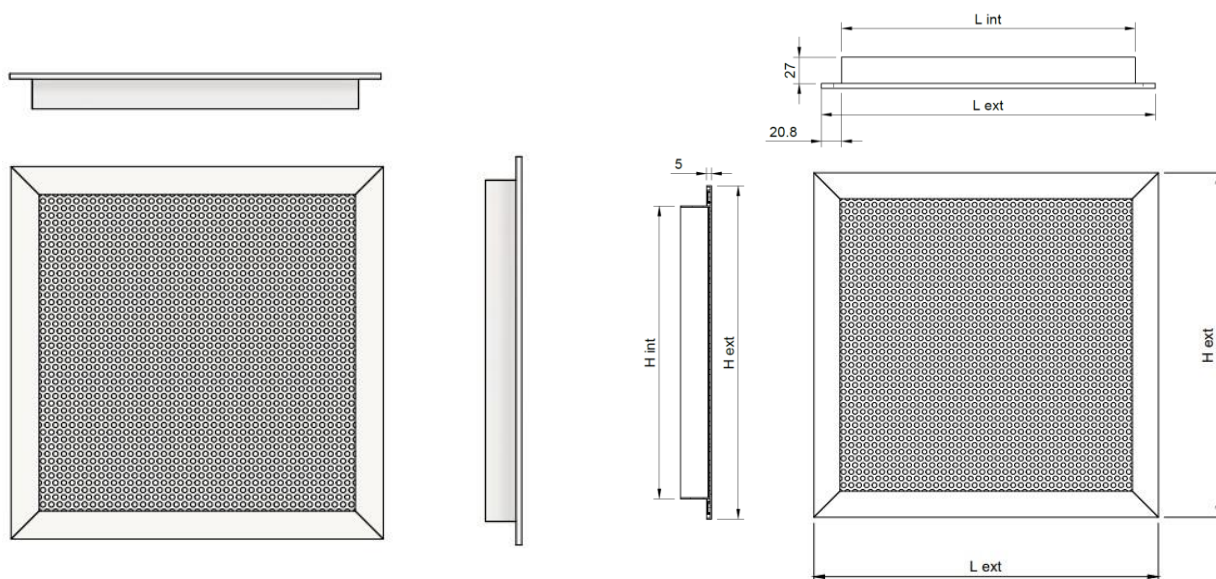

## Product specifications

The grille is made standard with mounting holes positioned on the product frame. The number of holes and their position are made according to the size of the product, according to the pictures and table.

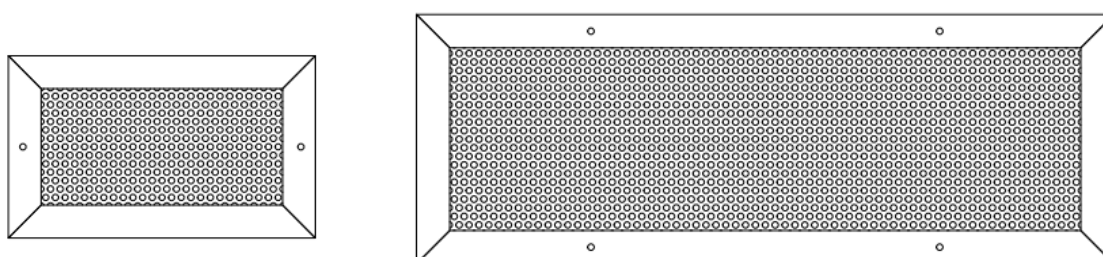

L x H [mm]	Number of holes												
	100	200	300	400	500	600	800	900	1000	1100	1200	1400	1500
75	2	2	2	2	2	4	4	4	4	6	6	6	6
100	2	2	2	2	2	4	4	4	4	6	6	6	6
200	-	2	2	2	2	4	4	4	4	6	6	6	6
300	-	-	4	4	4	4	4	4	4	6	6	6	6
400	-	-	-	4	4	4	4	4	4	6	6	6	6
500	-	-	-	-	4	4	4	4	6	6	6	6	6
600	-	-	-	-	-	4	4	4	6	6	6	6	6


## Accessories

The grille can be delivered with a connecting plenum to the circular duct, with horizontal or vertical connection.

The plenum is provided with suspension elements (lugs) and bead roll on the spigot, for easy fixing of the flexible duct.

The product can be accessorized with G4 air filter, opposed blade damper or mounting frame.

### Adapter (plenum box)


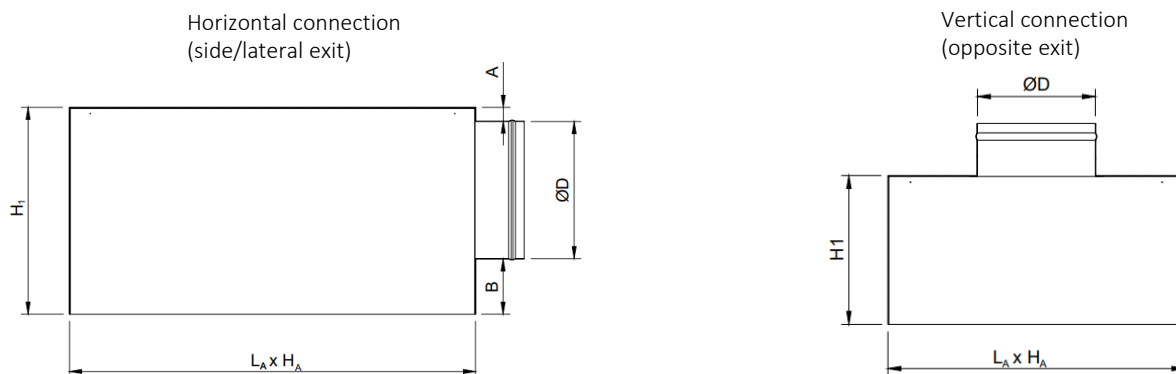


\* For fixing with screws:  $L_A \times H_A = L_{int} \times H_{int} \text{ grille} + 7 \text{ mm}$

\* For fixing with mounting frame:  $L_A \times H_A = L_c \times H_c \text{ mounting frame} + 4 \text{ mm}$


$A, B, H_1$  – depending on demand and  $\varnothing D$

The adapter is made of Z140 galvanized steel sheet and is equipped with suspension lugs.




W - Suspension lug

On request, the plenum can be insulated with 6 mm thick elastomeric rubber.




AN - Uninsulated adapter



AIZ - Insulated adapter

## Air filter G4 with frame (F-R)


G4 air filter with aluminum frame, used for air filtration and is mounted on the grille connection. The large dimensions are made in several pieces.

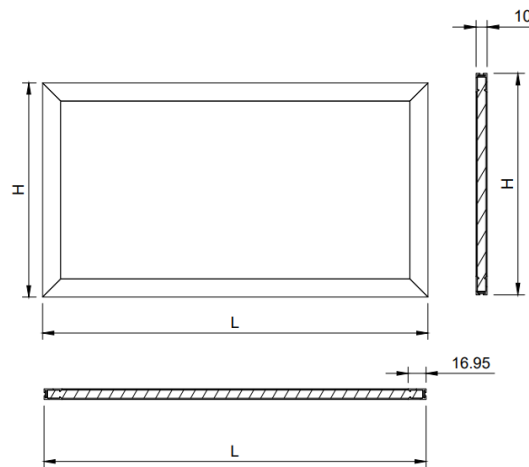

L x H [mm]	Air filter													
	100	200	300	400	500	600	800	900	1000	1100	1200	1300	1400	1500
75	1	1	1	1	1	1	1	1	1	1	1	2	2	2
100	1	1	1	1	1	1	1	1	1	1	1	2	2	2
200	-	1	1	1	1	1	1	1	1	1	1	2	2	2
300	-	-	1	1	1	1	1	1	1	1	1	2	2	2
400	-	-	-	1	1	1	1	1	1	1	1	2	2	2
500	-	-	-	-	2	2	2	2	2	2	2	2	2	2
600	-	-	-	-	-	2	2	2	2	2	2	2	2	2

## Mounting frame (CC)

The mounting frame is used when a hidden, easy and fast installation of the grille is desired. Depending on the size required, it is made and delivered in one or more pieces.

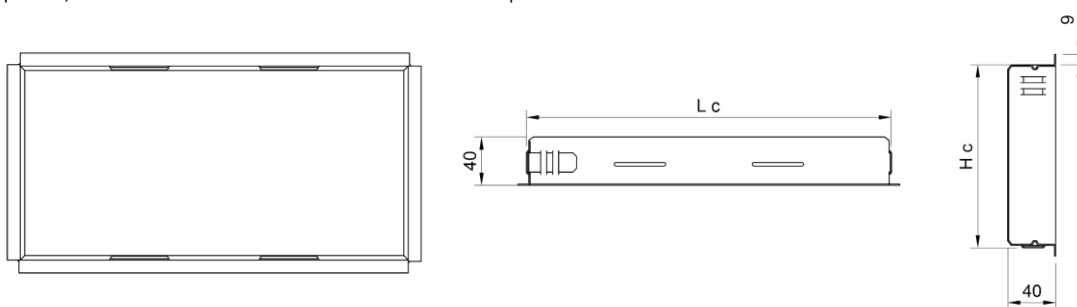


L x H [mm]	Mounting frame													
	100	200	300	400	500	600	800	900	1000	1100	1200	1300	1400	1500
75	1	1	1	1	1	1	1	1	1	1	2	2	2	2
100	1	1	1	1	1	1	1	1	1	1	2	2	2	2
200	-	1	1	1	1	1	1	1	1	1	2	2	2	2
300	-	-	1	1	1	1	1	1	1	1	2	2	2	2
400	-	-	-	1	1	1	1	1	1	1	2	2	2	2
500	-	-	-	-	1	1	1	1	1	1	2	2	2	2
600	-	-	-	-	-	1	1	1	1	1	2	2	2	2

For installation with mounting frame, the grille is equipped with clips that allow quick and easy clamping. The number of clips with which the grille is equipped depends on the size of the product.


L x H [mm]	Number of mounting clips														
	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
75	2	2	4	4	4	4	4	4	4	6	6	6	6	6	6
100	2	2	4	4	4	4	4	4	4	6	6	6	6	6	6
200	-	2	4	4	4	4	4	4	4	6	6	6	6	6	6
300	-	-	4	4	4	4	4	4	4	6	6	6	6	6	6
400	-	-	-	4	4	4	4	4	4	6	6	6	6	6	6
500	-	-	-	-	6	6	6	6	6	6	6	6	6	6	6
600	-	-	-	-	-	6	6	6	6	6	6	6	6	6	6

Example : PF-F + CC

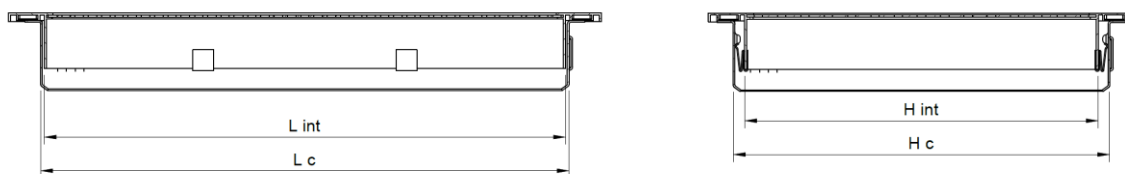

$$L_c \times H_c = L_{int} \times H_{int} \text{ grille} + 18 \text{ mm}$$

### Opposed blade damper (OBD)

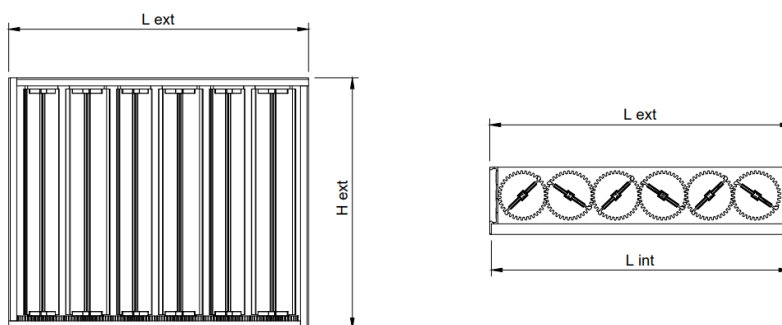

The damper is used to adjust the air flow. It is equipped with opposable blades and gears, mounted on the grille connection. The large dimensions are made in several pieces.

L x H [mm]	Opposed blade damper														
	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
75	1	1	1	1	1	1	2	2	2	2	2	2	3	3	3
100	1	1	1	1	1	1	2	2	2	2	2	2	3	3	3
200	-	1	1	1	1	1	2	2	2	2	2	2	3	3	3
300	-	-	1	1	1	1	2	2	2	2	2	2	3	3	3
400	-	-	-	1	1	1	2	2	2	2	2	2	3	3	3
500	-	-	-	-	2	2	2	2	3	3	3	3	3	3	4
600	-	-	-	-	-	2	2	2	3	3	3	3	3	3	4

## Functional parameters

### Supply

Air flow [m³/h]	LxH	300x300	400x400	500x500	600x600
	Ak [m²]	0.030	0.056	0.088	0.132
160	Ve <sub>eff</sub> [m/s]	1.5			
	X [m]	0.9			
	NR [dB(A)]	22.0			
	ΔPt [Pa]	9.0			
200	Ve <sub>eff</sub> [m/s]	1.8	1.0		
	X [m]	1.1	0.8		
	NR [dB(A)]	31.0	< 20		
	ΔPt [Pa]	14.0	4.0		
300	Ve <sub>eff</sub> [m/s]	2.8	1.5		
	X [m]	1.7	1.2		
	NR [dB(A)]	44.0	25.0		
	ΔPt [Pa]	31.0	8.0		
400	Ve <sub>eff</sub> [m/s]	3.7	2.0	1.3	
	X [m]	2.1	1.6	1.3	
	NR [dB(A)]	53.0	35.0	20.0	
	ΔPt [Pa]	53.0	15.0	5.0	
500	Ve <sub>eff</sub> [m/s]	4.6	2.5	1.6	
	X [m]	2.5	2.0	1.6	
	NR [dB(A)]	61.0	42.0	27.0	
	ΔPt [Pa]	81.0	23.0	8.0	
700	Ve <sub>eff</sub> [m/s]		3.5	2.2	1.5
	X [m]		2.2	2.2	1.8
	NR [dB(A)]		52.0	39.0	27.0
	ΔPt [Pa]		45.0	16.0	7.0
1000	Ve <sub>eff</sub> [m/s]		5.0	3.2	2.1
	X [m]		3.1	2.4	2.6
	NR [dB(A)]		63.0	51.0	39.0
	ΔPt [Pa]		90.0	30.0	15.0
1600	Ve <sub>eff</sub> [m/s]				3.4
	X [m]				3.1
	NR [dB(A)]				54.0
	ΔPt [Pa]				36.0

### Extraction

Air flow [m³/h]	LxH	300x300	400x400	500x500	600x600
	Ak [m²]	0.030	0.056	0.088	0.132
160	Ve <sub>eff</sub> [m/s]	1.5			
	NR [dB(A)]	19.0			
	ΔPt [Pa]	20.0			
200	Ve <sub>eff</sub> [m/s]	1.8			
	NR [dB(A)]	20.0			
	ΔPt [Pa]	31.0			
300	Ve <sub>eff</sub> [m/s]	2.8			
	NR [dB(A)]	26.0			
	ΔPt [Pa]	76.0			
400	Ve <sub>eff</sub> [m/s]	3.7	2.0		
	NR [dB(A)]	35.0	<20		
	ΔPt [Pa]	125.0	33.0		
500	Ve <sub>eff</sub> [m/s]	4.6	2.5		
	NR [dB(A)]	42.0	23.0		
	ΔPt [Pa]	185.0	47.0		
700	Ve <sub>eff</sub> [m/s]		3.5	2.2	
	NR [dB(A)]		34.0	20.0	
	ΔPt [Pa]		95.0	37.0	
1000	Ve <sub>eff</sub> [m/s]			3.2	2.1
	NR [dB(A)]			31.0	20.0
	ΔPt [Pa]			73.0	33.0
1600	Ve <sub>eff</sub> [m/s]				3.4
	NR [dB(A)]				36.0
	ΔPt [Pa]				85.0

#### The legend

Ak [m²] - The free surface

Ve<sub>eff</sub> [m/s] - The effective velocity of air in the grille

NR [dB (A)] - Noise level without room attenuation

X [m] - The length of the air jet at a speed of 0.2 m/s

ΔPt [Pa] - Pressure loss




## Installation

As standard the grille is mounted by means of screws.


Optionally, for a hidden and easy assembly, a mounting frame can be used. The installation of the grille in the mounting frame is done by clamping.

The grille with dimensions 595x595 mm (LxHext) is placed on the profile of the false suspended ceiling with size 600x600 mm (the product is made without holes).

### Installation with screws

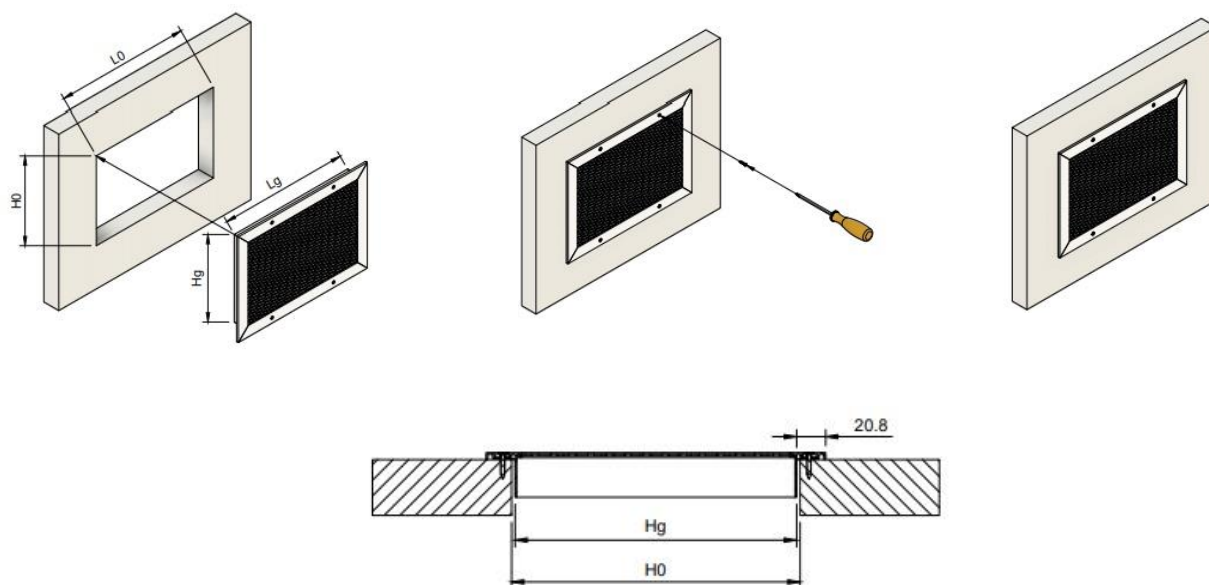


### Installation with mounting frame

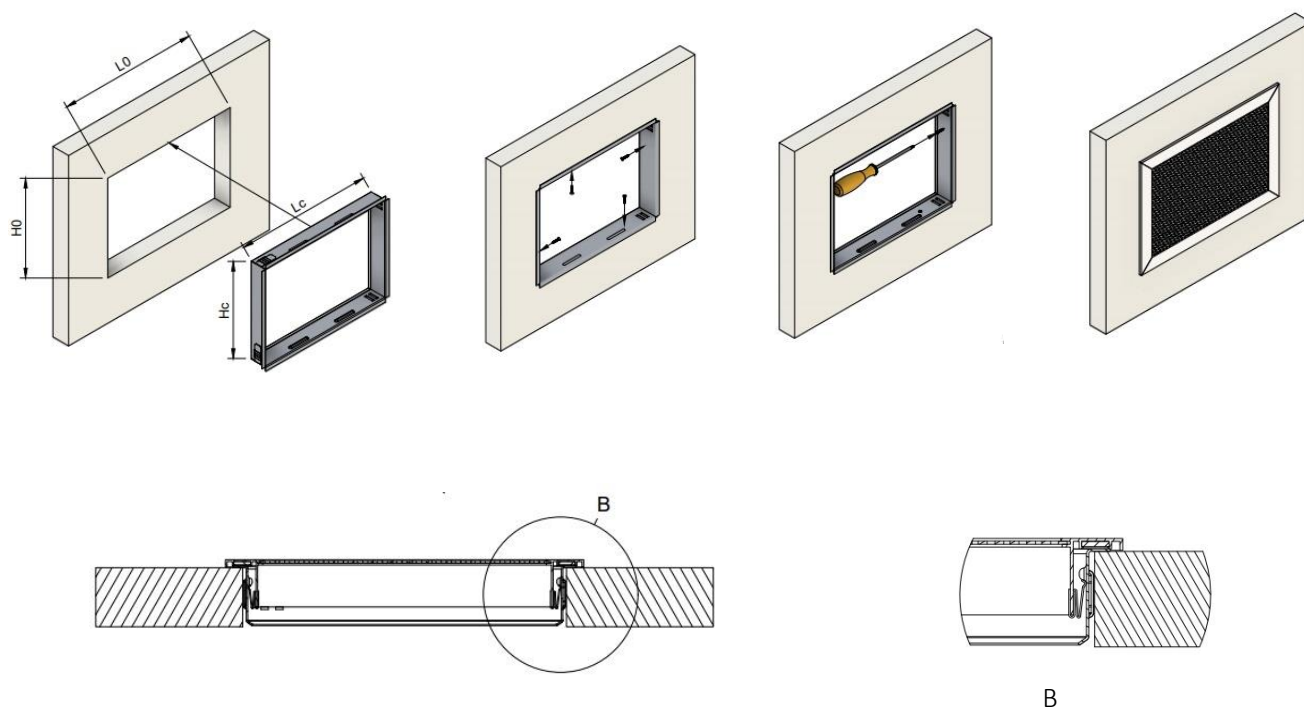



Installation in T-bar suspended ceiling  
PF-F 595x595 mm (external size)

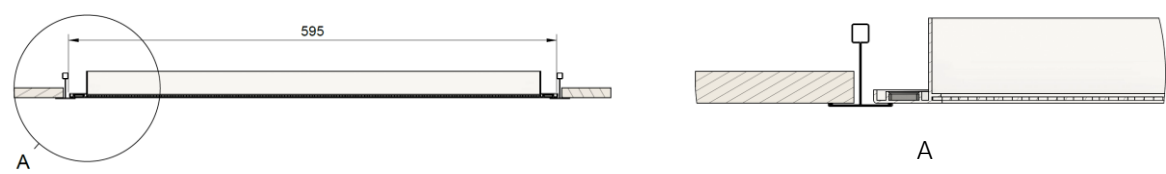

Order code

Example on how to place an order

	Type	Dimensions	Accessories	Mounting	Finish
PF-F					
On request					
F-R	Air filter	G4			
OBD	Control damper				
AIZ	Insulated adapter				
AN	Uninsulated adapter				
Screws	(standard)				
CC	Mounting frame	(optional)			
RAL9016					
RAL...-	Other RAL colors	on request			