

Air through perfection

Uninsulated flexible duct

TF-N



ACP
Flexible duct

Uninsulated flexible duct TF-N



Description

Uninsulated flexible duct is used in ventilation and air conditioning systems, without special requirements, for air supply.

Technical specifications

Characteristics

The duct can be easily installed on the round or oval connecting parts.

Uninsulated flexible duct is made in accordance with EN13180.

The flexible duct has a length of 10 m/piece.

Dimensional range: Ø102 mm ÷ Ø610 mm.

Materials

The flexible duct is made of multiple layers of aluminum and polyester with a high-strength carbon steel spiral, closed between the layers.


Product specifications

TF-N is made of 2 layers: 1 layer - 7 μ aluminum - 12 μ polyester and 1 layer of 12 μ polyester.

The temperature range is -30°C ÷ 80°C and the pressure is up to +2500 Pa.

The maximum air velocity is 30 m/s.

Chart

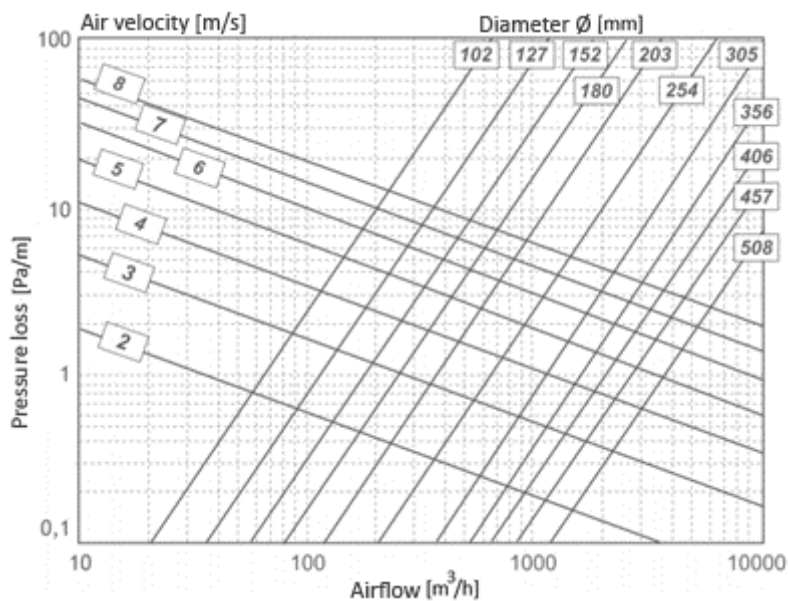

Order code

Example on how to place an order

Type	Dimensions
TF-N	
On request	