


Air through perfection


Return grille

SD-T

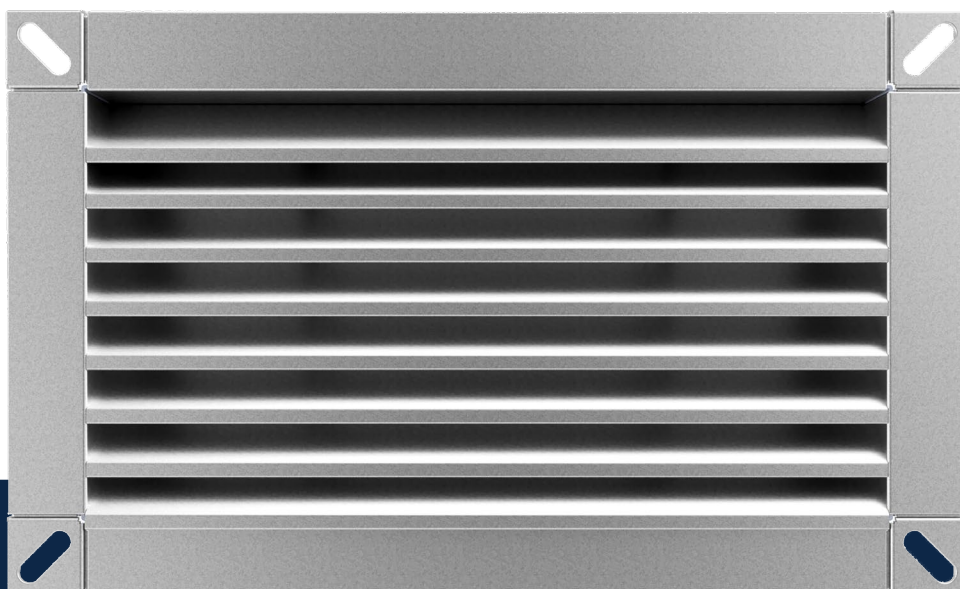

ACP
Smoke evacuation grilles

Return grille SD-T

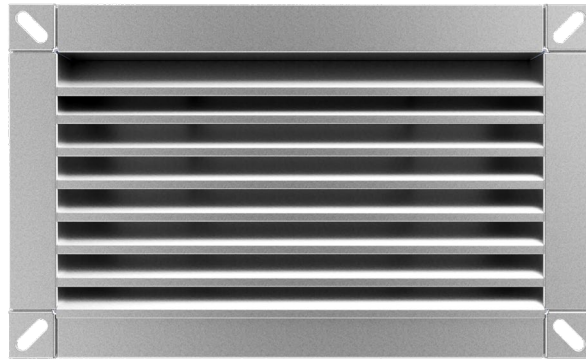

Description

SD-T is a galvanized steel exhaust grille with fixed blades at 45° inclination.

The grille is used to evacuate or recirculate air.

Technical specifications

Characteristics

The grille is provided with fixed blades, positioned at 45°, parallel to the "L" (length).

The product is made standard with oval holes for fixing with screws.

Grilles with dimensions > 600 mm are made with an intermediate stiffening crossbeam.

The standard finish is natural galvanized steel.


Dimensional limits: minimum 100 x 100 and maximum 2000 x 2000 mm.

Materials

The grille is made of galvanized steel and has natural finishing.

On request, the product can be painted in electrostatic field in any shade from the RAL palette.

Technical drawing

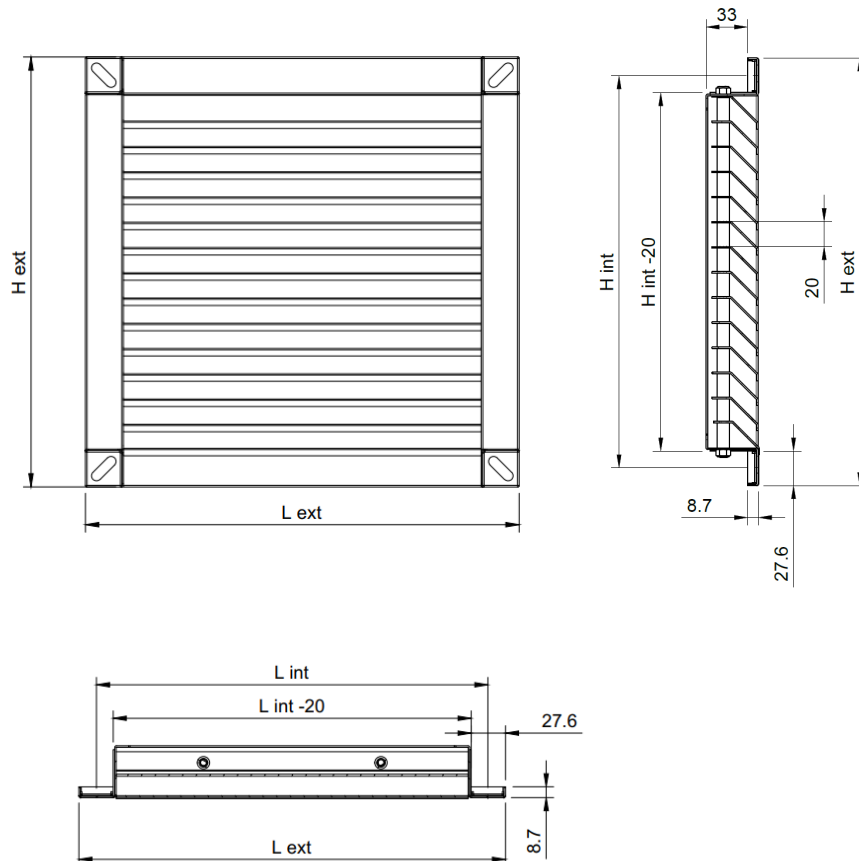


Accessories

The grille can be delivered with a connecting plenum to the circular duct, with horizontal or vertical connection.


The plenum is provided with suspension elements (lugs) and bead roll on the spigot, for easy fixing of the flexible duct.

Adapter (plenum box)

Horizontal connection
(side/lateral exit)


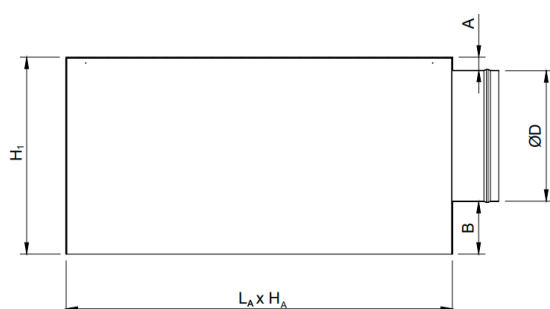


Vertical connection
(opposite exit)

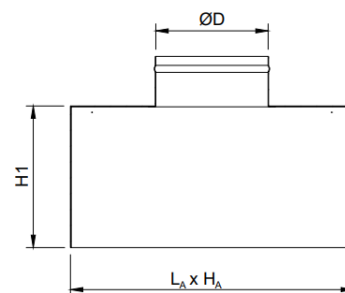


$L_A \times H_A$ – depending on $L \times H$ grille
A, B, H1 – depending on demand and $\varnothing D$

The adapter is made of Z140 galvanized steel sheet and is equipped with suspension lugs.




W - Suspension lug

On request, the plenum can be insulated with 6 mm thick elastomeric rubber.



AN - Uninsulated adapter



AIZ - Insulated adapter

Functional parameters

Air flow (m³/h)	L x H	200 x 100	300 x 150	400 x 200	300 x 300	500 x 300	600 x 300	800 x 300	600 x 600	1000 x 600
	Ak [m²]	0.0076	0.0189	0.0345	0.0416	0.0721	0.0915	0.1173	0.1759	0.2934
60	Veff[m/s]	2.2								
	ΔPt [Pa]	5.0								
	NR [dB(A)]	22.0								
80	Veff[m/s]	2.9								
	ΔPt [Pa]	9.0								
	NR [dB(A)]	29.0								
100	Veff[m/s]	3.7								
	ΔPt [Pa]	14.0								
	NR [dB(A)]	35.0								
140	Veff[m/s]	5.1	2.1							
	ΔPt [Pa]	27.0	2.0							
	NR [dB(A)]	44.0	16.0							
180	Veff[m/s]	6.6	2.6							
	ΔPt [Pa]	45.0	3.0							
	NR [dB(A)]	51.0	22.0							
200	Veff[m/s]	7.3	2.9	1.6						
	ΔPt [Pa]	56.0	4.0	3.0						
	NR [dB(A)]	53.0	25.0	22.0						
300	Veff[m/s]		4.4	2.4	2.0					
	ΔPt [Pa]		9.0	6.0	2.0					
	NR [dB(A)]		36.0	32.0	22.0					
400	Veff[m/s]		5.9	3.2	2.7					
	ΔPt [Pa]		16.0	12.0	4.0					
	NR [dB(A)]		43.0	40.0	30.0					
500	Veff[m/s]		7.3	4.0	3.3	1.9				
	ΔPt [Pa]		25.0	18.0	7.0	2.0				
	NR [dB(A)]		49.0	46.0	36.0	24.0				
600	Veff[m/s]				4.0	2.3	1.8	1.4		
	ΔPt [Pa]				11.0	3.0	2.0	1.0		
	NR [dB(A)]				41.0	29.0	24.0	18.0		
800	Veff[m/s]				5.3	3.1	2.4	1.9		
	ΔPt [Pa]				19.0	6.0	4.0	2.0		
	NR [dB(A)]				48.0	36.0	32.0	26.0		
1000	Veff[m/s]				6.7	3.9	3.0	2.4	1.6	
	ΔPt [Pa]				30.0	10.0	6.0	4.0	1.0	
	NR [dB(A)]				54.0	42.0	38.0	32.0	21.0	
1400	Veff[m/s]					5.4	4.3	3.3	2.2	
	ΔPt [Pa]					20.0	13.0	7.0	2.0	
	NR [dB(A)]					51.0	46.0	40.0	29.0	
1800	Veff[m/s]						5.5	4.3	2.8	
	ΔPt [Pa]						22.0	12.0	4.0	
	NR [dB(A)]						53.0	47.0	36.0	
2000	Veff[m/s]							4.7	3.2	
	ΔPt [Pa]							15.0	5.0	
	NR [dB(A)]							50.0	39.0	
3000	Veff[m/s]								4.7	2.8
	ΔPt [Pa]								13.0	1.0
	NR [dB(A)]								49.0	22.0
4000	Veff[m/s]									3.8
	ΔPt [Pa]									1.0
	NR [dB(A)]									30.0

The legend

Ak [m²] - The free surface

Veff [m/s] - The effective air speed in the grille


ΔPt [Pa] - Pressure loss

NR [dB (A)] - Noise level without room attenuation


Installation


The mounting/fixing of the grille is done with screws.

Wall/ceiling mounting

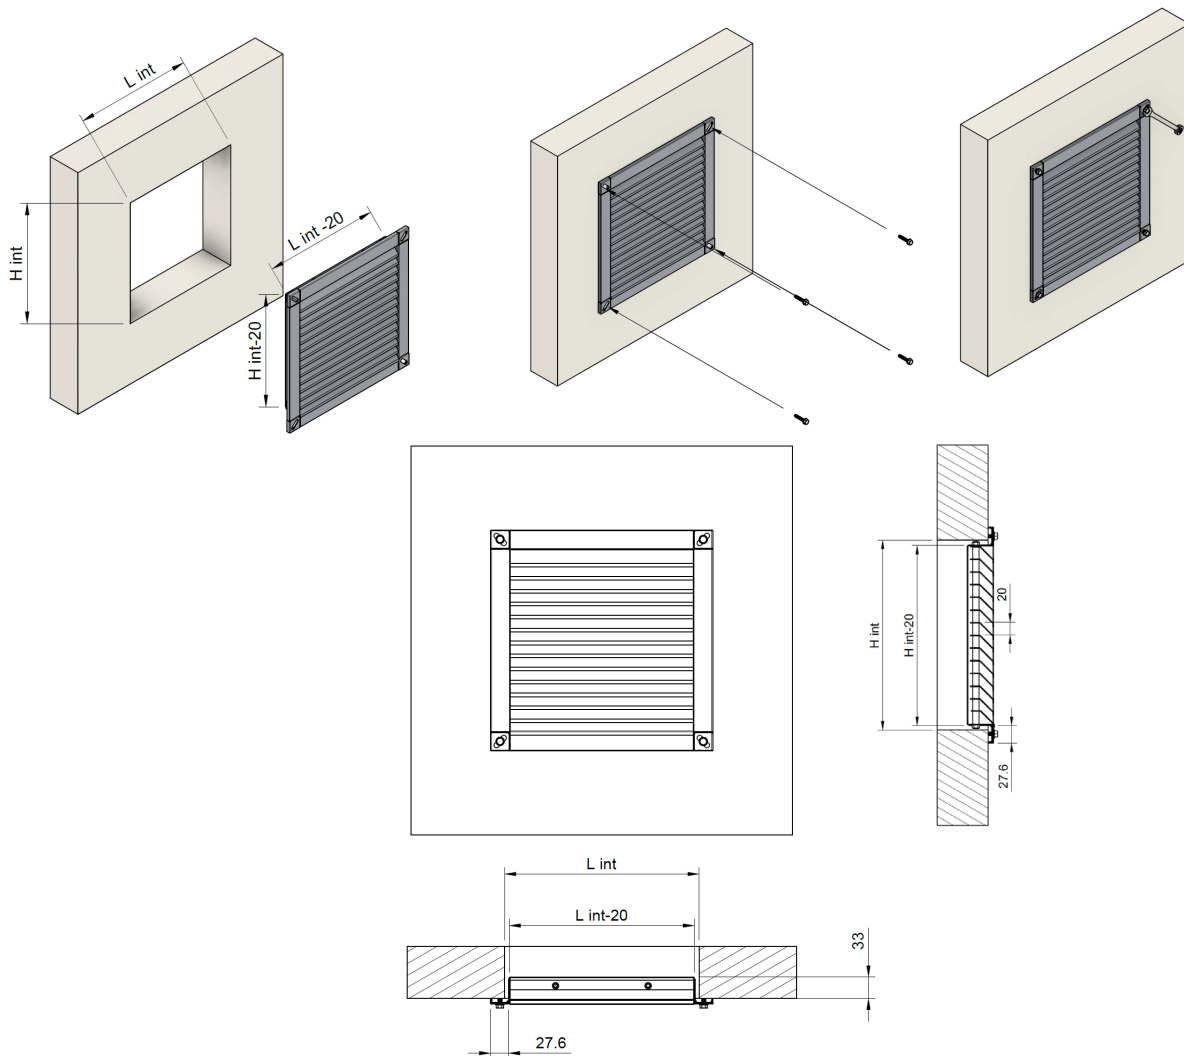

Rectangular duct mounting

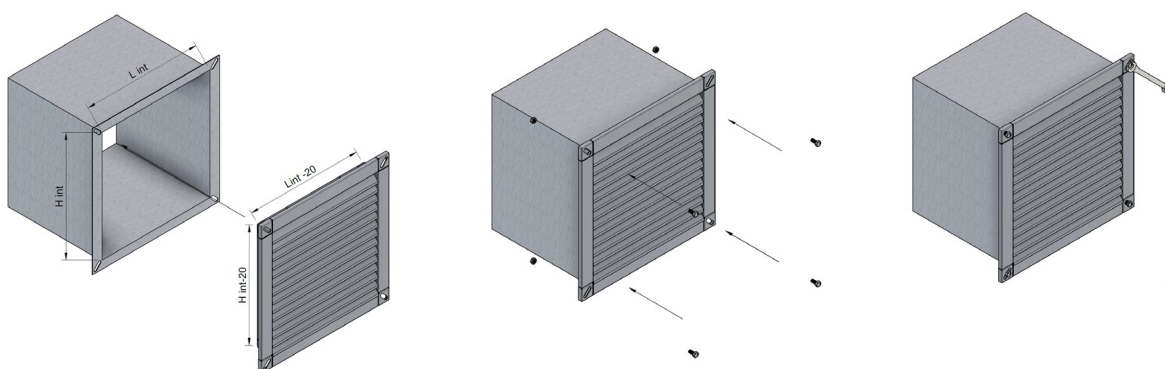

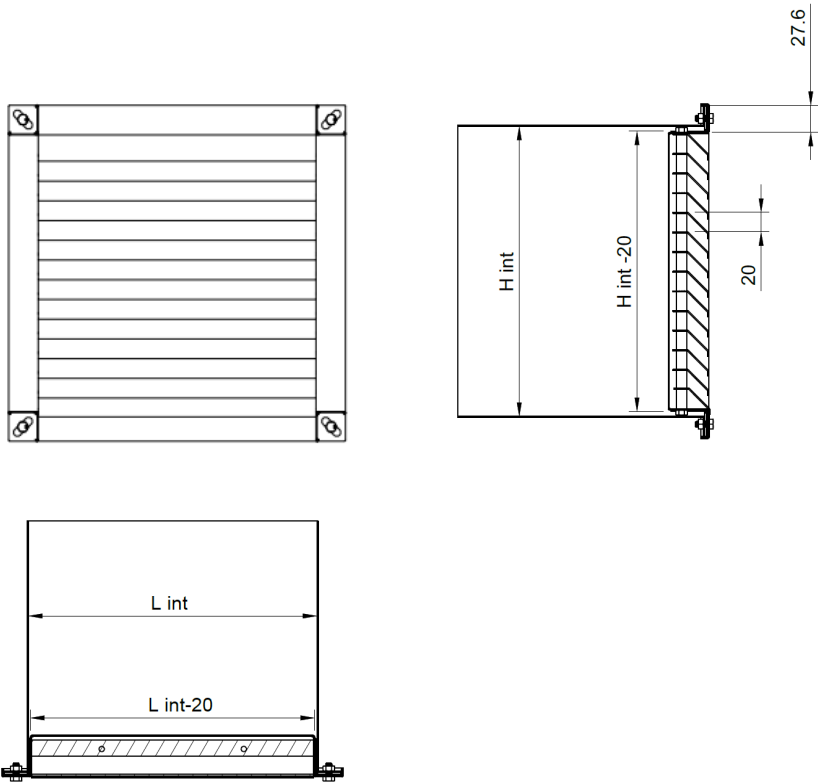

Order code

Example on how to place an order

	Type	Dimensions	Accessories	Finish
SD-T				
On request				
AIZ - Insulated adapter				
AN - Uninsulated adapter				
Natural (galvanized steel)				
RAL..- Other RAL colors on request				